OLYMPUS®

FE-250

Designed to Do More.™

Capture life in every light!

Super High Sensitivity (up to 3200)

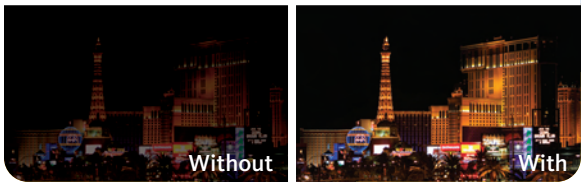

Higher ISO sensitivity, faster shutter speeds, and a longer working flash range allow you to capture low light backgrounds and fast moving subjects clearly day or night.

High-Speed Sequential Shooting

Shoot fast-action sequences like a pro! At the click of a button, you can take several shots in rapid succession that freeze moments in time so you're sure to get the perfect action shot.

16 Shooting Modes

Landscape | Portrait | Pet

Getting the best shot has never been easier! Preset shooting modes, such as Portrait, Landscape, Night Scene, Movie and more, optimize the camera's settings to ensure you capture a great shot.

Megapixel	Optical	Color	Shooting	Digital Image	AVI Movie	Help	Rechargeable
8.0 Effective	3x Zoom	2.5" LCD	16 Modes	Stabilization Mode	With Audio	Guide	Li-ion Battery

getolympus.com

- **8.0 Megapixels** The FE-250's high-resolution CCD delivers superior image quality for larger prints without sacrificing detail.
- **Easy-to-Use** Digital photography made easy. Built-in Help Guides, One-Touch Operations, Preset Scene Modes, and a large LCD are just a few of the features that make using the FE-250 simple and fun.
- **Digital Image Stabilization (High ISO up to 3200)** Freeze the action! With high ISO sensitivity and faster shutter speeds, you can capture sharp, blur-free images, even if you or your subject is moving.
- **Bright Capture Technology** Keep it bright even in low light! When shooting or recording in low light, Bright Capture allows you to clearly preview your shot on the LCD and capture brighter, more vivid images* – without a flash.
- **2.5" High-Resolution LCD** The large, bright LCD (230,000 pixels) provides easy shooting and sharing of your images with friends and family.
- **3x Optical Zoom** The precision-crafted OLYMPUS LENS delivers sharper, clearer images and brings you closer to the action without taking a step.
- **12fps High-Speed Sequential Shooting** Shoot fast-action sequences like a pro! At the click of a button, you can take several shots in rapid succession to capture every second of the action. With up to 12fps** high-speed sequential shooting, you can freeze moments in time to get the shot you want.
- **16 Shooting Modes including Movie with Sound** Getting the best shot has never been easier! Preset shooting modes optimize the camera's settings for any shooting situation to ensure you capture a great shot. Select Scene Modes such as Portrait, Landscape, Night Scene, Sports, Beach & Snow and more. Records TV-quality AVI movies with sound (640x480/30fps) up to the capacity of your xD card†.
- **NEW! My Favorites** Always keep your favorite memories with you! This in-camera album allows you to store up to 9 of your favorite images to share with friends and family anytime – using a minimal amount of memory.
- **TruePic TURBO™ Image Processor** Capture the moment with superior image quality. This exclusive Olympus technology delivers truer colors and quicker start-up, shot-to-shot and shutter release time so you always get the best results.

*available in select scene modes
**in SQ modes only (3 megapixel) without a flash.
†using Olympus H-Type xD-Picture Card™

OLYMPUS®

FE-250

Designed to Do More.™

Specifications

Stock No. 225945

Imager:	8.0 Megapixel (effective), 8.3 Megapixel gross, 1/1.8" CCD (1.4cm)
Lens:	7.4 – 22.2mm (35 – 105mm equivalent in 35mm photography), 6 lenses in 4 groups
Zoom:	3x Optical + 4x Digital (Seamless to 12x)
Aperture Range:	f2.8 – f4.7
LCD:	2.5" (6.4cm) Color LCD, approx. 230,000 pixels
Focus System:	Autofocus (CCD Contrast Detection, iESP, Single)
Focus Range:	Normal Mode: (Wide) 23.6" (0.6m) – infinity (Tele) 23.6" (0.6m) – infinity Macro Mode: (Wide) 11.8" (0.3m) – infinity (Tele) 19.7" (0.5m) – infinity Super Macro Mode: 3.9" (0.1m) – infinity
Shutter Speed:	Auto (1/1000 sec. – 4 sec.)
ISO (SOS: Standard Output Sensitivity):	Auto, 64, 100, 200, 400, 800, 1600, 3200, 6400*, 10000* (*in SQ mode only)
White Balance:	Auto (ESP)
Exposure Compensation:	±2 EV steps in 1/3 EV steps
Recording Modes:	Still Image: Exif 2.21, JPEG, PIM3 Movie Mode: AVI Motion JPEG with Audio
Adjustment Resolutions:	3,264 x 2,448, SHQ / HQ 2,048 x 1,536, SQ1 640 x 480, SQ2 1,920 x 1,080, 16:9
Shooting Modes:	16 Shooting Modes: Program Auto, Scene Presets (Portrait, Landscape, Night & Portrait, Indoor, Candle, Self-Portrait, Sunset, Sport, Fireworks, Cuisine, Documents, Pet, Auction), Digital Image Stabilization Mode & Movie
Panorama:	Up to 10 frames automatically stitchable with OLYMPUS Master Software when using Olympus brand xD-Picture Card™
Sequential Shooting:	5fps up to 12 frames in SQ mode
Movie Mode:	AVI Motion JPEG with Audio: 640x480/30fps (SHQ), 320x240/15fps (HQ)
Image Processing:	TruePic TURBO™ Image Processor
Pixel Mapping:	Automatic Pixel Mapping (APM) available via menu setting
Noise Reduction:	Set automatically at shutter speeds of 0.5 seconds or longer
Image Playback:	Still Image: Single, Index (4/9/16/25), Enlargement (up to 10x), Slideshow, My Favorites, Rotation Movie: Normal, Reverse, Frame-By-Frame
Playback Edit Effects:	Still Image: Resize (640x480, 320x240),
Direct Printing Options:	PictBridge™, DPOF
Flash:	Built-in
Flash Modes:	Auto, Red-Eye Reduction, Fill-In, Off
Flash Working Range:	Wide: 0.98 ft. (0.3m) – 14.1 ft. (4.3m) Tele: 1.6 ft. (0.5m) – 8.5 ft. (2.6m)
Self-Timer:	12 Seconds
Settings Memorization:	On/Off (Hold changes/Reset to default settings)
Date/Time Calendar:	Simultaneous recording into image data, automatic up to 2099
Memory:	20MB internal memory
Removable Media Card:	xD-Picture Card™ (Std/Type H/M- 16, 32, 64, 128, 256, 512MB, 1GB, or 2GB)
Outer Connectors:	Multi-terminal (USB, Audio/Video Output)
Auto-Connect USB:	2.0 Full Speed (USB mass storage)
System Requirements:	Auto-connect USB: Windows® 98SE/ME/2000PRO/XP/VISTA with USB port, Mac OS® 9.0-9.2x/OS X 10.1-10.4 with USB port. Software: Windows® 2000PRO/XP/VISTA, Mac® 10.3 and higher
Operating Environment:	Operation: 32° – 104°F (0° – 40°C), 30% – 90% humidity Storage: -4° – 140°F (-20° – 60°C), 10% – 90% humidity
Power Supply:	Li-Ion Rechargeable Battery (LI-42B)
Size:	3.7" W x 2.2" H x 0.88" D (94mm x 56.5mm x 22.3mm)
Weight:	4.1oz. (115g) without batteries and media card

getolympus.com

Available Accessories

Olympus xD-Picture Card™
256MB
512MB
1GB
2GB

MAUSB-200 xD-Picture Card USB Reader/Writer
202049

FE/Stylus Accessory Kit
(Soft Leather Case, Metal Neck Strap, and LI-42B Rechargeable Battery)
202057

200496	Metal Neck Strap
202059	CB-USB7 Digital Camera USB Cable (Replacement)
202060	CB-AVC5 Audio/Video Cable (Replacement)
202044	2-year Extended Digital Warranty



LI-42B Rechargeable Battery
202034

Slim Leather Case*
202085 Red
202086 Dk. Brown
202087 Black

*Color options depend on model.

Package Contents

- FE-250 Digital Camera
- Wrist Strap
- Quick Start Guide
- Lithium-Ion Battery (LI-42B) & Charger (LI-40C)
- USB Cable, Audio/Video Cable
- OLYMPUS Master Software CD-ROM
- Basic Manual and Adavanced Manual CD-ROM
- Warranty Card

TruePic TURBO · PictBridge · PRINT Image Matching · Exif Print · xD-Picture Card™ · Certified for Windows Vista™

Olympus Digital Still Cameras can be used with confidence wherever you go. They are backed by a one-year repair warranty service that is available worldwide. Please contact our service center or check the Authorized Distributors list for service and applicable areas of service. May not be available in all areas.

Specifications subject to change without notice or obligation on the part of the manufacturer.

© 2007 Olympus Imaging America Inc. All rights reserved. Printed in the United States of America. Olympus is a trademark or registered trademark of Olympus Corporation, Olympus Imaging America Inc. or their affiliated entities. All trademarks and registered trademarks listed herein are the property of their respective holders.

D1384-0207